

SPLIT-CORE CURRENT TRANSFORMERS

MODEL SCCT

FEATURES

- 0.1% Accuracy
- Split-core
- AC Output 26.6mA

18 MONTH WARRANTY

LOW COST



APPLICATIONS

- For use with ESP3 series Watt transducers
- Other metering applications

MODEL SELECTION

INPUT AC AMPS	STANDARD OUTPUT MODEL SCCT-
	0-26.6mAac
0 - 200	015-200
0 - 400	025-400

ORDERING INFORMATION

Example: 200Aac Input, with a 26.6mAac Output.

SCCT-015-200

Optional inputs and outputs are available, consult factory.

Intended for use over insulated conductors only!

SPECIFICATIONS

INPUT

Current(See Model Selection Chart)
 Over-current..... 1.2 X F.S.
 Frequency Range..... 50-60Hz

ACCURACY ±0.1% F.S.

PHYSICAL & ENVIRONMENTAL


Weight(See Dimension Chart)
 Lead Length (025-400) 72"
 (015-200) 102"
 Lead Type..... 22AWG stranded, White (X1) & Black
 Operating Temperature 70°C Max.

OUTPUT


Scaling0-F.S. Input = 0-26.6mAac Output
 Burden..... 1VA

DIMENSIONS

SCCT-015-200

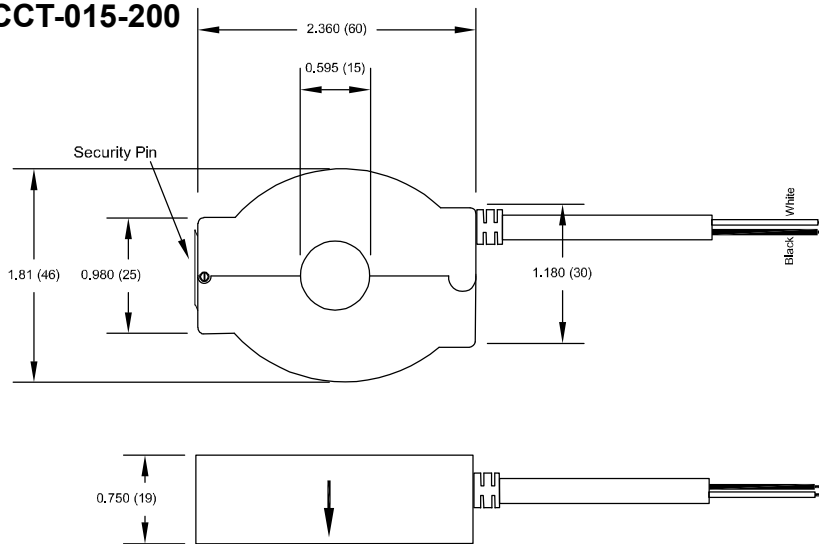

SCCT-025-400

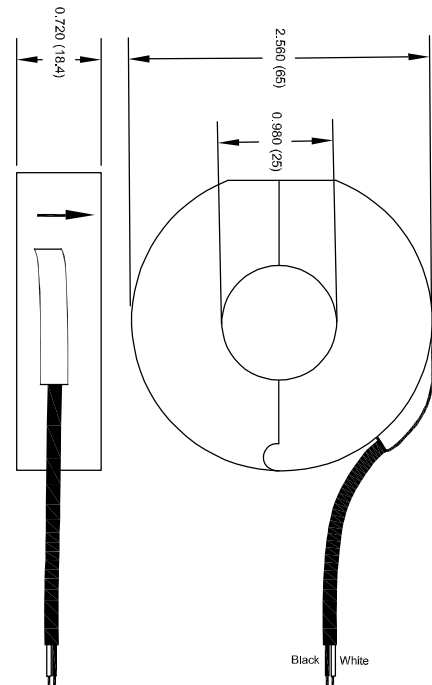

MODEL SCCT-	DIMENSIONS (inches)			WT. (lbs.)
	Height	ID	OD	
015-200	0.8	0.53	1.73	0.2
025-400	0.8	1.26	3.11	0.5

Dwg# 0902-01094-B Rev--



OhioSemitronics, Inc.
 What Can We Measure for You?

WWW.OHIOSEMITRONICS.COM

4242 Reynolds Drive
 Hilliard, Ohio 43026-1264

TELEPHONE: 614-777-1005

TOLL FREE: 1-800-537-6732

FAX: 614-777-4511